


## Smith Island Rigid Core Bamboo Flooring

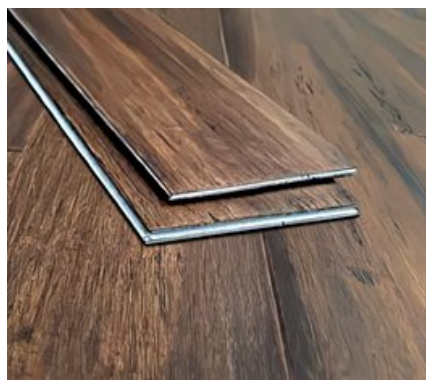

### Specifications

|                           |  |
|---------------------------|--|
| <b>Item No</b>            | 300844149850   |
| <b>Flooring group</b>     | Click Lock BSPC                                      |
| <b>Price</b>              | 4.24/sq ft   |
| <b>Species</b>            | Strand Woven Bamboo with rigid SPC core              |
| <b>Sq ft/box</b>          | 15.45  |
| <b>Finish</b>             | Accuseal Ultra with aluminum oxide                   |
| <b>Surface</b>            | antiqued   |
| <b>Janka rating</b>       | 5342   |
| <b>Grain</b>              | Bamboo_SPC   |
| <b>Sustainability</b>     | Lacey Act Compliant.                                 |
| <b>Nailing info</b>       | do not nail  |
| <b>Length</b>             | 3 ft (920 mm)  |
| <b>Width</b>              | 5-1/8 in (130 mm)                                    |
| <b>Thickness</b>          | 9/32 in (7mm - includes 1mm acoustic pad)            |
| <b>Wear layer</b>         | 1 mm Strand Bamboo                                   |
| <b>Profile</b>            | Click Lock   |
| <b>Profile/edges</b>      | micro bevel  |
| <b>Planks Description</b> | Single length planks: all planks are same dimensions |

|                              |   |
|------------------------------|---|
| <b>Warranty</b>              | Lifetime Structural and Finish (residential)                            |
| <b>R value</b>               |   |
| <b>Moisture content</b>      | ASTM D4442, Oven Dry Method: 6%-10% average                             |
| <b>SurfSlip resistance</b>   | Coefficient of Friction: ASTM D2394 Average; Static 0.586; Sliding 0.59 |
| <b>Flammability</b>          | ASTM E648: Class 1 Interior   |
| <b>Smoke density</b>         | ASTM E622: Max 344 flaming, 192 non-flaming                             |
| <b>Dimensional</b>           | ASTM D1037 50/90% RH,   |
| <b>Stability</b>             | Linear .03, Thickness 1.52, Width .20                                   |
| <b>Coating adhesion</b>      | Classification: 5B  |
| <b>Acclimation period</b>    | 24 hours  |
| <b>Weight/box</b>            | 37  |
| <b>Planks/box</b>            | 12  |
| <b>Radiant Heat Safe</b>     | Yes   |
| <b>High traffic</b>          | Yes   |
| <b>Pet friendly</b>          | Yes   |
| <b>Install below grade</b>   | Yes   |
| <b>Floating installation</b> | Yes   |
| <b>Installation</b>          | Floating  |

