


Carbonized Antiqued Rigid Core Bamboo Flooring

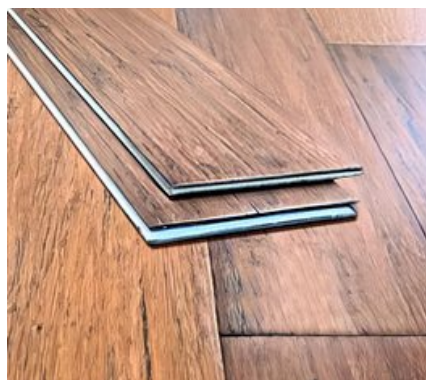

Specifications

| | |
|---------------------------|--|
| Item No | 808857874252 |
| Flooring group | Click Lock BSPC |
| Price | 4.36/sq ft |
| Species | Strand Woven Bamboo with rigid SPC core |
| Sq ft/box | 15.45 |
| Finish | Accuseal Ultra with aluminum oxide |
| Surface | antiqued |
| Janka rating | 5342 |
| Grain | Bamboo_SPC |
| Sustainability | Lacey Act Compliant. |
| Nailing info | do not nail |
| Length | 3 ft (920 mm) |
| Width | 5-1/8 in (130 mm) |
| Thickness | 9/32 in (7mm - includes 1mm acoustic pad) |
| Wear layer | 1 mm Strand Bamboo |
| Profile | Click Lock |
| Profile/edges | micro bevel |
| Planks Description | Single length planks: all planks are same dimensions |

| | |
|------------------------------|---|
| Warranty | Lifetime Structural and Finish (residential) |
| R value | |
| Moisture content | ASTM D4442, Oven Dry Method: 6%-10% average |
| SurfSlip resistance | Coefficient of Friction: ASTM D2394 Average; Static 0.586; Sliding 0.59 |
| Flammability | ASTM E648: Class 1 Interior |
| Smoke density | ASTM E622: Max 344 flaming, 192 non-flaming |
| Dimensional | ASTM D1037 50/90% RH, |
| Stability | Linear .03, Thickness 1.52, Width .20 |
| Coating adhesion | Classification: 5B |
| Acclimation period | 24 hours |
| Weight/box | 37 |
| Planks/box | 12 |
| Radiant Heat Safe | Yes |
| High traffic | Yes |
| Pet friendly | Yes |
| Install below grade | Yes |
| Floating installation | Yes |
| Installation | Floating |

